


2000 Slide Switches - up to 5 position 10A 250Vac



10A 250Vac T85
6(3)A 250Vac T85

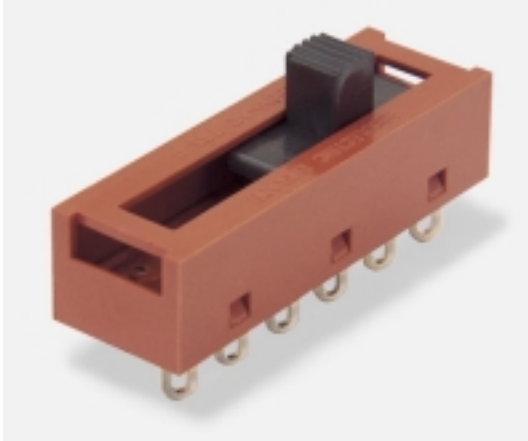

UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL65°C, file no. E45221, CSA file no. LR10990

μ contact gap

Please specify: Standard action (SP116) or Light action (SP118)

2000 series lubrication is inorganic and does not degrade plastics

Technical data on pages 4 & 5

T 2 2 20 5 C ---

TERMINAL SERIES POSITIONS CIRCUIT SLIDER BODY PRINT, COLOUR, ETC

TERMINAL	SERIES	POS'N	CIRCUIT Viewed from back	SLIDER
K 2.8 x 0.8	2	2 ♦ Switching positions	10 	0
R 2.8 x 0.8			20 	6
T Solder			30 	D
X PCB 0.8 Sq.			40 	L
Y PCB 0.8 Sq. For mounting stability switches have extra "support" terminals		3 ♦ Switching positions	10 	1
			20 	7
			30 	E
			40 	N
		4 ♦ Switching positions	10 	2
			20 	9
			30 	G
			40 	P
		5 ♦ Switching positions	10 	A
			20 	H
			30 	R
			40 	S
			10 	B
			20 	J
			30 	C
			40 	K
				T



X22205C ---



T2220EC ---



T23206A ---



T24306A ---




T25302A ---




T25100A ---

BODY


C 2 positions




H 2 positions




A 3 positions




H 3 positions




A 4 positions



H 4 positions



A 5 positions




OPTIONS

Colour


For custom slider colours call the factory.
A full range is available for large orders

DIMENSIONS (mm)


2 Position C body




2 Position H body





Cut-out/PCB Matrix




3 Position A body





3 Position H body



4 Position A body



4 Position H body



5 Position A body

