




# KBP201G THRU KBP207G

Single Phase 2.0 AMPS. Glass Passivated Bridge Rectifiers



Voltage Range  
50 to 1000 Volts  
Current  
2.0 Amperes

## KBP

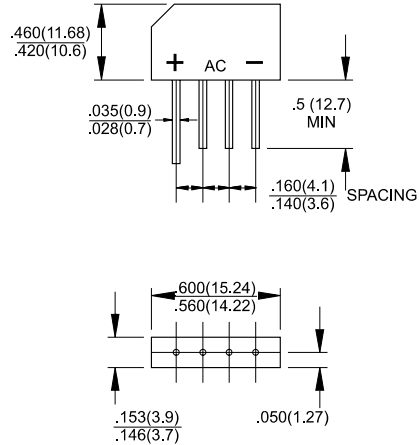

Dimensions in inches and (millimeters)

## Features

- ✧ UL Recognized File # E-96005
- ✧ Glass passivated junction
- ✧ Ideal for printed circuit board
- ✧ Reliable low cost construction technique results in inexpensive product
- ✧ High temperature soldering guaranteed: 250 °C / 10 seconds at 5 lbs. ( 2.3 Kg ) tension
- ✧ Small size, simple installation  
Leads solderable per MIL-STD-202, Method 208

## Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.


For capacitive load, derate current by 20%

Type Number	KBP 201G	KBP 202G	KBP 203G	KBP 204G	KBP 205G	KBP 206G	KBP 207G	Units
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ T <sub>A</sub> = 50°C	2.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	60							A
Maximum Instantaneous Forward Voltage @ 3.14A	1.2							V
Maximum DC Reverse Current @ T <sub>A</sub> =25°C at Rated DC Blocking Voltage @ T <sub>A</sub> =125°C	10 500							µA µA
Typical thermal resistance (Note) R <sub>θJA</sub> R <sub>θJL</sub>	25 8							°C/W
Operating Temperature Range T <sub>J</sub>	-55 to +150							°C
Storage Temperature Range T <sub>STG</sub>	-55 to +150							°C


Note: Thermal Resistance from Junction to Ambient and from Junction to Lead Mounted on P.C.B. With 0.47 x 0.47" (12 x 12mm) Copper Pads.

## RATINGS AND CHARACTERISTIC CURVES (KBP201G THRU KBP207G)


**FIG.1- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT**

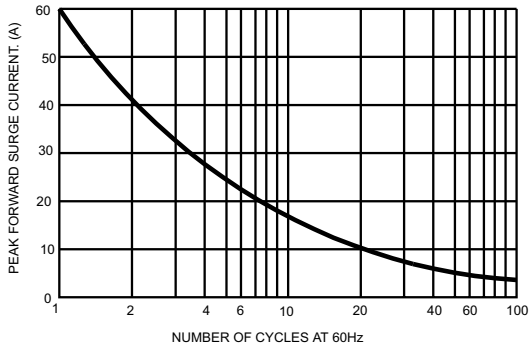

**FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE**

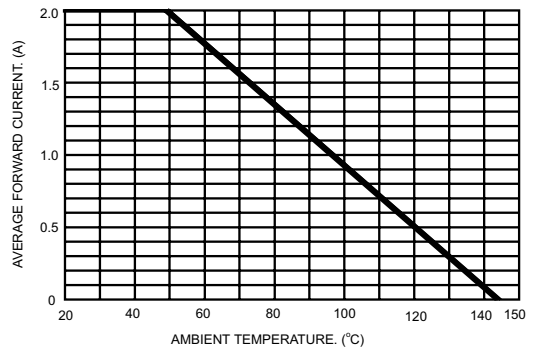

**FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT**

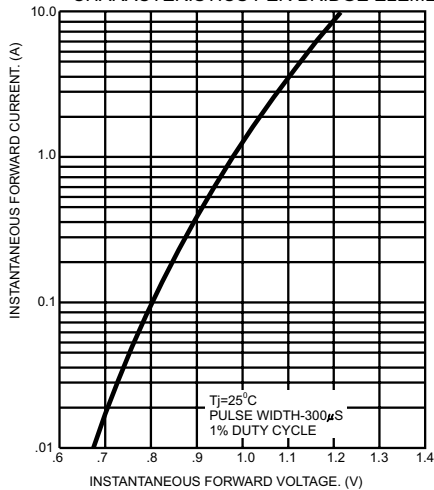

**FIG.4- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT**

