

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C





D

E

F

G

H

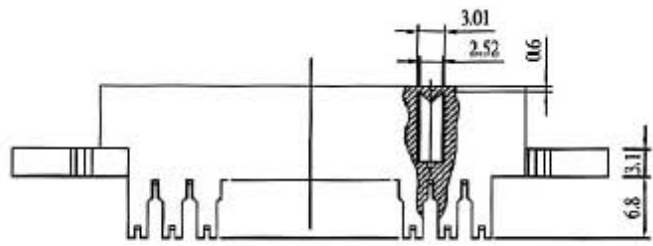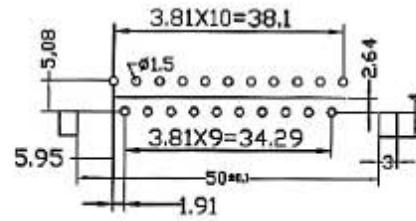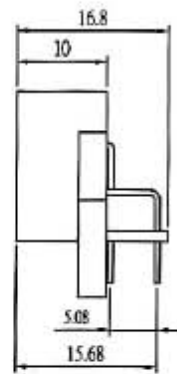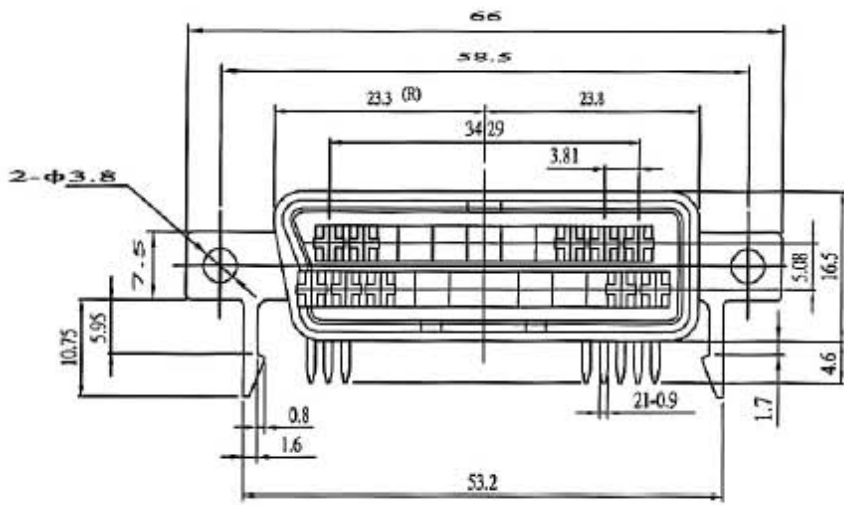

**MATERIAL:**

- A. INSULATOR: PC(94V-2)&GLASS-FIBER
- B. CONTACT: BRONZE
- C. CONTACT PLATED: TIN PLATED

**SPECIFICATION:**

A. CURRENT RATE: 3A/250V AC

**CONTACT RESISTANCE:**

- A. (BRONZE) 11.5m AT 2VΩ DC 100mA
- B. (PHOSPHOR BRONZE) 10.9m AT 2VΩ DC 100mA
- C. INSULATOR RESISTANCE: 1.5G ATW 500V DC 1Min
- D. Dielectric withstanding: 1000Vvar 1Min

**T&T** Connection System Co., Ltd.

UNIT

SCALE

PART NAME

MM

2:1

Scart Socket 90° 21P Female  
W/Ears

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日: 2002/12/04

DRAWING.

APPROVED

±0.3

JEFFREY

A

1 2 3 4 5 6 7 8