


MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0)
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS AT DC 500V
 OPERATION TEMPERATURE: -25°C TO +85°C

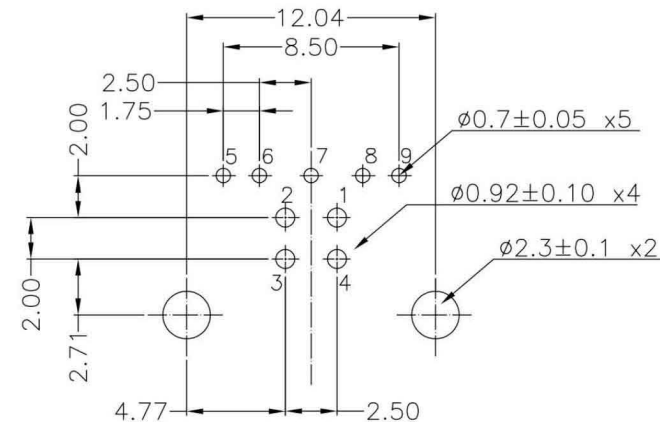

RECOMMENDED PCB LAYOUT
 TOP VIEW (TOLERANCE? ±0.05)

<p>RoHS Compliant</p>		<p>T&T Connection System Co., Ltd.</p>	
<p>APPD. 核准 Betty</p>		<p>TOLERANCE X ±0.30 XX ±0.25 XXX ±0.150 Ang. ±2°</p>	<p>PART NAME 品名 USB-B 3.0 BLUE FEMALE RIGHT ANGLE PCB 9 PIN MATERIAL: PBT</p>
<p>DWG. 製圖 Betty</p>	<p>SCALE 比例 參考</p>	<p>UNIT 單位 MM</p>	<p>PART NO. 料號 USB-B3.0S09PFHCT</p>
<p>DATE 制表日 2012/02/14</p>	<p>PAGE 張數 1 OF 1</p>	<p>REV. 版次 B</p>	